


NC 3-12x56

LED-LIT TACTICAL VARIABLE ZOOM RIFLESCOPE

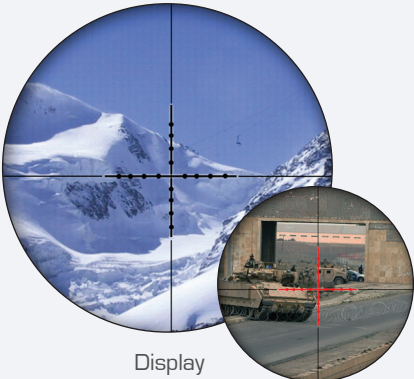

The NC 3-12x56 is a daytime riflescope which features variable magnification and is designed for use on a variety of weapon platforms. The riflescope features a Mil-Dot reticle positioned in the first focal plane of the eyepiece, ensuring permanent sizing of the reticle regardless of the variable magnification setting being utilized. The reticle is LED-lit with 11 adjustable brightness levels to choose from.

Ideal for acquiring small targets at long distances, the riflescope is equipped with a central system parallax adjustment, effective for ranges of 50 metres to infinity. The riflescope incorporates windage adjustment (the multi-revolving scheme) and elevation adjustment (single-revolving scheme). The unit has tactile/audible step adjustments.

| Optics | NC 3-12x56 |
|---------------------------------------|------------|
| Minimum magnification (x) | 3 |
| Maximum magnification (x) | 12 |
| Objective lens diameter (mm) | 56 |
| Exit pupil diameter @ 3x (mm) | 18.6 |
| Exit pupil diameter @ 12x (mm) | 4.7 |
| Field of view @100 yards @ 3x (feet) | 36 |
| Field of view @100 yards @ 12x (feet) | 9 |
| Eye relief (mm) | 100 |
| Diopter adjustment range | ±3 |
| Ballistics | |
| Reticle pattern | Mil-Dot |
| Lit reticle | ✓ |
| Lit reticle colour | Red |
| Adjustable reticle brightness | ✓ |
| Windage adjustment step (MOA) | 0.25 |
| Windage adjustment range (MOA) | 120 |
| Elevation adjustment step (MOA) | 0.25 |
| Elevation adjustment range (MOA) | 340 |

NC 3-12x56

LED-LIT TACTICAL VARIABLE ZOOM RIFLESCOPE



| Mechanics, Electronics & Environmental | |
|--|-----------------|
| Dimensions (mm) | 328x69x65 |
| Weight (g) | 695 (w/o mount) |
| Shock resistance (G) | 500 |
| Battery type | CR 2032 (3 V) |
| Battery life, maximum (hours) | 100 |
| Operating temperature range (°C) | -50 to +50 |
| Storage temperature range (°C) | -52 to +55 |
| Humidity (%) | 98 |
| Waterproofing | MIL-STD-810G |

DELIVERY SET

Supplied with the following standard accessories:

- Objective lens cover
- Eyepiece cover
- Cleaning cloth
- 1x CR 2032 battery
- Operation manual
- Soft case

OPTIONAL ACCESSORIES



LENSPEN



QR Mount (30mm)



NVS 27M



Hard Case