


NC 3-12x56

LED-LIT TACTICAL VARIABLE ZOOM RIFLESCOPE

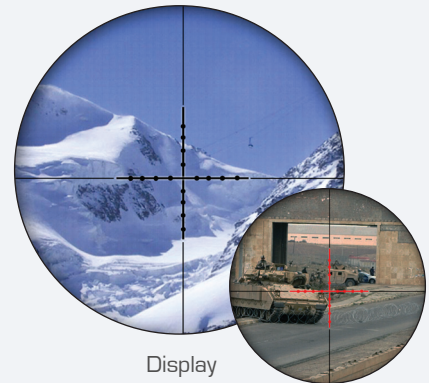

The NC 3-12x56 is a daytime rifle scope which features variable magnification and is designed for use on a variety of weapon platforms. The rifle scope features a Mil-Dot reticle positioned in the second focal plane of the eyepiece, ensuring permanent sizing of the reticle regardless of the variable magnification setting being utilized. The reticle is LED-lit with 11 adjustable brightness levels to choose from.

Ideal for acquiring small targets at long distances, the rifle scope is equipped with a central system parallax adjustment, effective for ranges of 50 metres to infinity. The rifle scope incorporates windage adjustment (the multi-revolving scheme) and elevation adjustment (single-revolving scheme). The unit has tactile/audible step adjustments.

Optics	NC 3-12x56
Minimum magnification (x)	3
Maximum magnification (x)	12
Objective lens diameter (mm)	56
Exit pupil diameter @ 3x (mm)	18.6
Exit pupil diameter @ 12x (mm)	4.7
Field of view @100 yards @ 3x (feet)	36
Field of view @100 yards @ 12x (feet)	9
Eye relief (mm)	100
Diopter adjustment range	±3
Ballistics	
Reticle pattern	Mil-Dot
Lit reticle	✓
Lit reticle colour	Red
Adjustable reticle brightness	✓
Windage adjustment step (MOA)	0.25
Windage adjustment range (MOA)	120
Elevation adjustment step (MOA)	0.25
Elevation adjustment range (MOA)	340

NC 3-12x56

LED-LIT TACTICAL VARIABLE ZOOM RIFLESCOPE



Mechanics, Electronics & Environmental	
Dimensions (mm)	328x69x65
Weight (g)	695 (w/o mount)
Shock resistance (G)	500
Battery type	CR 2032 (3 V)
Battery life, maximum (hours)	100
Operating temperature range (°C)	-50 to +50
Storage temperature range (°C)	-52 to +55
Humidity (%)	98
Waterproofing	MIL-STD-810G

DELIVERY SET

Supplied with the following standard accessories:

- Objective lens cover
- Eyepiece cover
- Cleaning cloth
- 1x CR 2032 battery
- Operation manual
- Soft case

OPTIONAL ACCESSORIES



LENSPEN



QR Mount (30mm)



NVS 27M



Hard Case