

LRM 1200/LRM 1500 SERIES


This laser Rangefinder Monocular series comprises three models suitable for a wide range of tasks. These systems provide instant distance and speed (SPD modification) measurements consistently and accurately. The optical channel provides a sharp, clear image under all conditions. All devices use the same ergonomic lightweight body with rubberized grip.

FEATURES:

- 1 - Measurement result
- 2 - Units of measurement (yards, meters)
- 3 - Low battery indicator
- 4 - Indicator of active laser
- 5 - Target quality indicator
- 6 - Reticle (cross or rectangular selectable)



Delivered Set

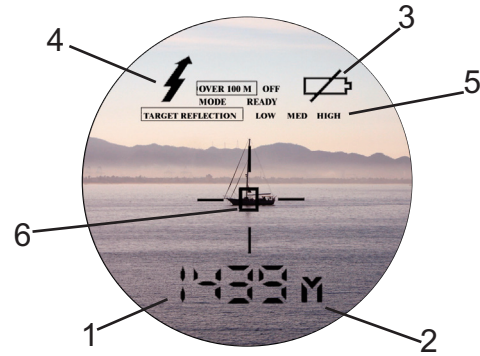

Specifications

Model	LRM 1200	LRM 1500	LRM 1500SPD
Magnification	7x	7x	7x
Objective lens diameter	25 mm	25 mm	25 mm
Field of view	8°	8°	8°
Laser type	Class 1 eye-safe	Class 1 eye-safe	Class 1 eye-safe
Diopter adjustment range	±4	±4	±4

Range Finder

Measuring range, m	20-1,200 m	20-1,500 m	20-1,500 m
Accuracy	± 1.5 m	± 1.5 m	± 1.5 m
Meters/Yards display	V	V	V
Target quality indicator	V	V	-
Last 10 readings recall	V	V	V
Reticle shape selection (+ or [])	V	V	V
Automatic rain mode	V	V	V
'Best Target' measurement	V	V	V
Speed detector	-	-	V

Environmental

Operating temperature range	-25°C ... +50°C
Storage temperature range	-45°C ... +50°C

Miscellaneous

Battery	9 V	9 V	9 V
Tripod socket	V	V	V
Weight without battery	445 g	445 g	445 g
Dimensions	127x125x60 mm	127x125x60 mm	127x125x60 mm