

LRB 6K

LONG RANGE LASER RANGEFINDER BINOCULAR
NSN:1240-20-010-6217



This device compatible with:    

LRB 6K - Display

The LRB 6K is built to outperform any handheld laser rangefinder binocular available today. Packing a virtually endless set of performance features into a MIL-SPEC form factor, the LRB 6K can handle anything professional operators can throw its way. A 6,000 metre (NATO target) measuring range, built-in digital magnetic compass, and a crystal-clear LED display are combined into an invaluable force multiplier. The LRB 6K requires virtually no maintenance and very little operational training. Through USB, Bluetooth and RS-232 interfaces, the LRB 6K can be operated remotely, have its stored data exported, and communicate with external GPS systems and ballistic computers (only with Bluetooth installed).

Optics	LRB 6K
Magnification (x)	7
Objective lens diameter (mm)	42
Field of view (°)	6
Eye relief (mm)	20
Diopter adjustment range	±5
Interpupillary distance (mm)	58 - 72
Rangefinder	
Eye safety	Class 1, eye-safe
Wavelength (nm)	1550
Measuring distance capability (m)*	6,000
Distance measurement accuracy (m)	±1
Azimuth measurement accuracy (°)	±1/17
Inclination measurement accuracy (°)	±0.5/8.8
Speed detection	Yes
First/last target logic	Yes
Gating capability	Yes
Gating step (m)	≥100
Scan mode	Yes
Peripheral compatability	PLGR, Bal Comp, PC, BT, Android™
Distance between objects	Yes
Horizontal distance between objects	Yes
Azimuth difference between objects	Yes
Inclination difference between two objects	Yes
Height difference between objects	Yes

*2.3m x 2.3m NATO standard target

LRB 6K

LONG RANGE LASER RANGEFINDER BINOCULAR
NSN:1240-20-010-6217



Display	
Meters/yards display	Yes
Display type	OLED
Data output ports	RS-232, USB, Bluetooth (optional), NMEA
Last 10 readings recall	Yes
Reticle pattern selection	Yes
Low battery indicator	Yes
Mechanics, Electronics & Environmental	
Dimensions (mm)	210x178x85
Weight without batteries (g)	1,580
Tripod mountable	Yes
Power Supply	1x 2CR5 non-magnetic
Battery life (# of measurements)	5,000
Operating temperature range (°C)	-40 to +60
Storage temperature range (°C)	-40 to +60
Waterproofing	MIL-STD-810G

DELIVERY SET

Supplied with the following standard accessories:

- Soft carrying case
- Hard transport case
- 1x 6V Lithium 2CR5 Battery
- RS 232 and USB cable
- Cover for eyepieces
- Lens cleaning pen
- Software
- Operation manual

OPTIONAL ACCESSORIES



TACT3-S Tripod



LRF GPS Cable



LRB 6/12K Rechargeable Kit



Car Adapter



LRF AC/DC Adapter




U Coupler



ARF Filters



Smart Cable

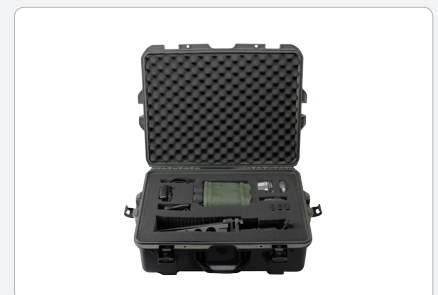

Hard Case with Optional Accessories



WWW.NEWCON-OPTIK.COM

ALL SPECIFICATIONS, ACCESSORIES AND INFORMATION ARE SUBJECT TO CHANGE.

105 Sparks Avenue Toronto, Ontario Canada M2H 2S5
newconsales@newcon-optik.com
Tel: +1 (416) 663-6963 Fax: +1 (416) 663-9065

LRB 6K LONG RANGE LASER RANGEFINDER BINOCULAR